

TEUPEN[®]
...access redefined

since '77



LE 12T

Your benefits

- Fits in freight elevators
- Low surface load for use on sensitive flooring
- Smooth, proportional electro-hydraulic controls
- Reliable and comprehensive safety control system
- Full height and outreach with 120 kg platform capacity
- Gradeability of 2,0 ° / 3,5 %
- Operates on 24 V battery - further engines optional




Can be driven from the platform




Compact design to fit in freight elevators



Working over railings

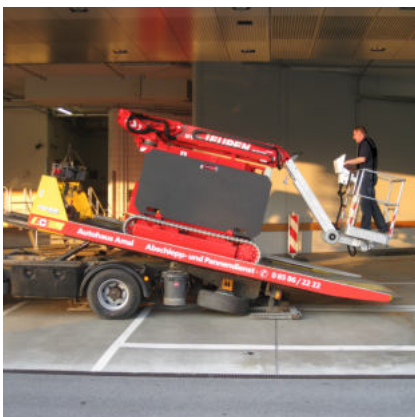

Transportation on standard vehicles

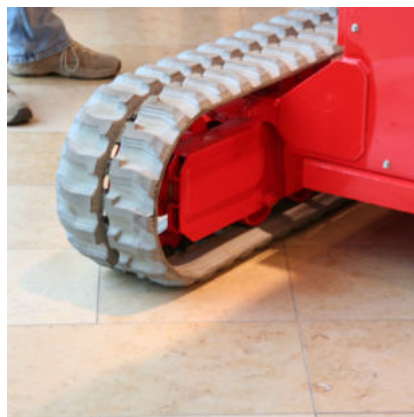

Standard: non-marking rubber tracks



Removable platform and jib