

TEUPEN[®]
...access redefined

since '77

LEO 40GTX

Your benefits

- Travels through a double door
- Low surface load for use on sensitive flooring
- Smooth, proportional electro-hydraulic control
- Electric emergency lowering system as standard
- Reliable and comprehensive safety control system
- Automatic, multi-position and self-levelling outriggers
- Hydraulically height- and width adjustable crawler tracks



Setting up on ground slopes up to 16,7 ° / 30,0 %




LEO40GTX - for indoor and outdoor use




Travels through a double door and has a low surface load on sensitive floors



Hydraulically height- and width adjustable crawler tracks for driving on slopes

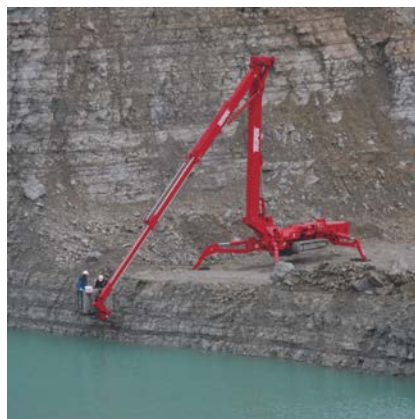

Working in negative areas up to 4,0 m

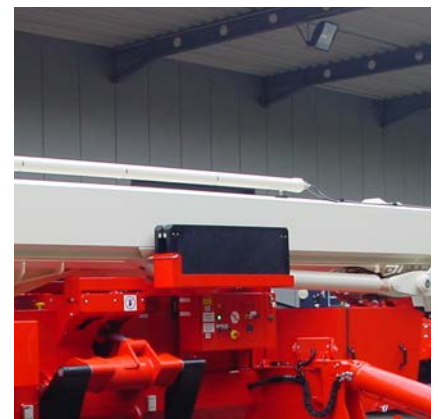

Optional - support for sliding pads