

**TEUPEN**<sup>®</sup>  
...access redefined

*since '77*



**LE 21GT LE 24GT**



Your benefits

- Travels through a standard door
- Low surface load for use on sensitive flooring
- Precise manoeuvring via sensitive radio remote control
- Reliable and comprehensive safety control system
- Automatic, multi-position and self-levelling outriggers
- Hydraulically height- and width adjustable crawler tracks
- Optional: lifting device (250 kg capacity)



Upper and lower boom can be operated independently for overcoming barriers



Setting up on ground slopes up to 19,0 ° / 34,0 %




Turntable rotation (450 °)  
Rotatable platform (2x 90 °)



Minimum pass through width of 0,98 m



Hydraulically height- and width adjustable crawler tracks for driving on slopes

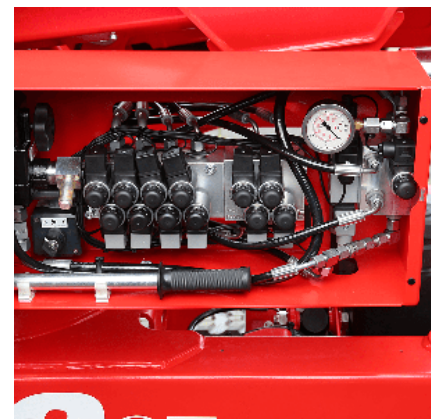

Optional available - additional hydraulic drive with electric drive